

MODEL SBC-932

Automatic Side-Seal Strapping Machine


CAN/BOTTLE UNITIZING SYSTEMS



FEATURES

- Reliable SSE-900 Servo Driven Strapping Head
- Pendant mounted machine controls for access on either side of the machine
- Indexing strapping head to ensure tight strap application
- Out of strap indicator
- 'Crash-proof' bayonet cylinder prevents damage to bayonet
- Available with three-strand and five-strand chain conveyor and integrated pallet turntable
- Optional bayonet and under feed

NEW!
SSE900

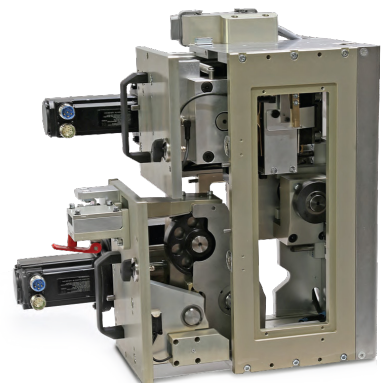

YOUR SUCCESS IS OUR BUSINESS

SAMUEL 1855
PACKAGING SYSTEMS GROUP

MODEL SBC-932

Automatic Side-Seal Strapping Machine


STANDARD FEATURES

The SBC-932 Fully Automatic Strapping System is ideal for bulk loads of containers. There are four compression levels available to provide the best package for your application.

The SBC-932 features the fast and reliable SSE-900 Servo Driven Strapping Head. The heavy duty heater knife has a cycle life in excess of 900,000 cycles, which insures strong consistent welds and low maintenance. Independent motors, which simplify maintenance and eliminate the need for multiple clutch assemblies drive the major functions of the SSE-900 Servo Driven Strapping Head.

OPTIONS

- Free Standing Compression Units: 500 lbs., 1,200 lbs. or 4,000 lbs.
- Strap Track Underfeed
- Multi-Strand or Roller Conveyor with or without Turntable
- Audible out of Strap Indicator
- Light Beacon Alarm System
- Power Head Float for Glass Applications

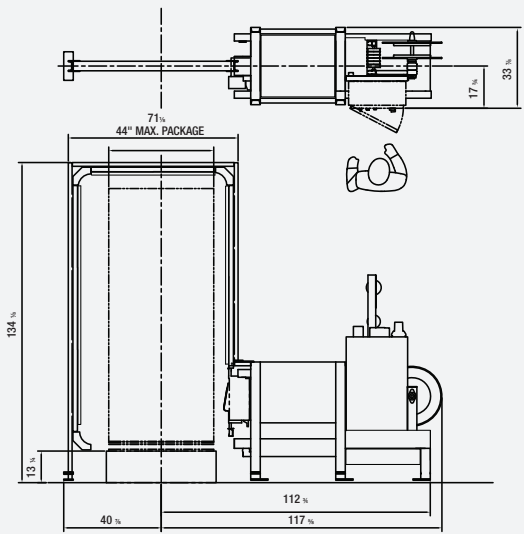

© 132823 - SBC 932 - January 2020
Specifications are for guidance purposes only and subject to change without notice.


SPECIFICATIONS

Electrical	460V, 3ph, 60hz
Current	150 A
Strapping	Polyester
Strap Size	3/8" (9.5 mm) - 3/8" - 1/2" (9.5 mm - 12.7 mm)
Package Sizes	*Standard - Height 26" min. up to 110" max. Width 40" min. up to 60" max.
Conveyor Height	*Standard - 9" up to 20"

*Alternative track sizes and conveyor heights are available.

SSE SERIES

SPEED. POWER. INTELLIGENCE.

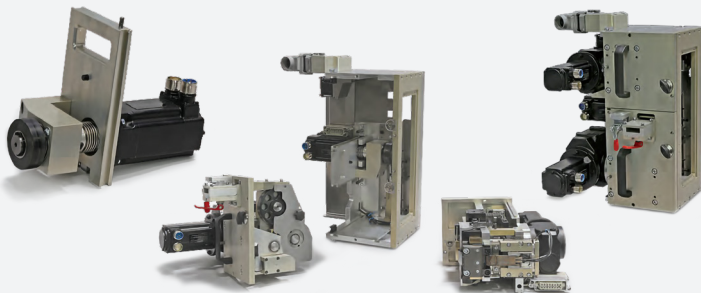

FEATURES

- **SPEED.** Industry Leading Speed of up to 49 ft/sec.
- **POWER.** Quick-change Cartridges. Four Piece Modular Design.
- **INTELLIGENCE.** Servo Actuated. Smart lot Integration. Small Footprint

SPECIFICATIONS

	900
Maximum Tension	550 lb.
Weight	42 lb., 12 lb., 40 lb.
Strap Width	3/8" and 5/8"
Strap Thickness	0.019 to 0.043"
Feed Speed	up to 49 fps

ABOUT US

Founded in 1855, Samuel, Son & Co., Limited, is a family-owned and operated, integrated network of metal manufacturing, processing and distribution divisions – providing seamless access to metals, industrial products and related value-added services. We leverage our industry expertise, breadth of experience and the passion of our people to help drive success for North American business – one customer at a time.