



2026 TOOL PRODUCT ASSORTMENT

Prices subject to change without notice. Proprietary property of Samuel Packaging Systems Group. Copyright 2026

Plastic Tools



BATTERY

STL-3SD

The STL-3SD is a great battery powered tool for light duty applications for smaller PPY and PET strapping. Pricing includes (1) strapping tool, (1) battery, (1) charger.

D365 #	Seal Type	Strap Width	Strap Thickness
106397	Friction	1/2" (12 mm)	.020"–.045" (.5–1.14 mm)
106398	Friction	5/8" (16 mm)	.025"–.045" (.63–1.14 mm)

STL-3SD Accessories: 124456 14 V Battery
124455 14 V Charger
116678 Wear Plate – includes all screws required for mounting



BATTERY

STL-3HD

The STL-3HD is a great battery powered hand tool for mid-size PET strapping. Pricing includes (1) strapping tool, (1) battery, (1) charger.

D365 #	Seal Type	Strap Width	Strap Thickness
115636	Friction	5/8" (16 mm)	.031"–.43" (.8–1.09 mm)
106400	Friction	3/4" (19 mm)	.031"–.43" (.8–1.09 mm)

STL-3HD Accessories: 124458 18 V Battery
124455 18 V Charger
116678 Wear Plate – includes all screws required for mounting



BATTERY

STL-3XD

The STL-3XD is a tool scaled for larger PET strapping up to 1.25". A great option for switching from steel strapping to PET. Pricing includes (1) strapping tool, (1) battery, (1) charger.

D365 #	Seal Type	Strap Width	Strap Thickness
106401	Friction	3/4" (19 mm)	.040"–.055" (1.02–1.40 mm)
115631	Friction	1" (25 mm)	.040"–.050" (1.00–1.30 mm)
115633	Friction	1 1/4" (32 mm)	.040"–.050" (1.00–1.30 mm)

STL-3XD Accessories: 124460 36 V Battery
124462 36 V Charger
124429 Suspension Bracket – includes all screws required for mounting
114986 Wear Plate – includes all screws required for mounting



PNEUMATIC


STL-P

For pneumatic applications, the SLT-P is available in a range of sizes for PET strapping. Pricing includes (1) strapping tool, (1) suspension bracket.

D365 #	Seal Type	Strap Width	Strap Thickness
115641	Friction	5/8" (16 mm)	.031"–.041" (.76–1.0 mm)
115642	Friction	3/4" (19 mm)	.031"–.051" (.76–1.3 mm)
116537	Friction	1" (25 mm)	.035"–.051" (.89–1.3 mm)
116538	Friction	1 1/4" (32 mm)	.035"–.051" (.89–1.3 mm)

	Model Name	Description	D365 #	Seal Type	Compatible Seals	Strap Width	Strap Thickness
MANUAL POWER	P-Light Tensioner (T-6)	This manual light duty PPY tensioner is perfect for use with seals.	126236		4-O, 5-O, 6-O, 4-M, 5-M, 6-M	1/2"–3/4" (13–19 mm)	Up to .030" (1.0 mm)
	P-Heavy Tensioner (T-6-M)	This manual heavy duty tensioner is perfect for use with both PPY and PET strap paired with seals.	126238		4-O, 5-O, 6-O, 4-M, 5-M, 6-M	1/2"–3/4" (13–19 mm)	Up to .041" (1.0 mm)
	P-Light Sealer (S-4)	This manual light duty PPY and PET sealer works well with small straps.	115569	Seal	4-O, 4-C	1/2" (12 mm)	.015"–.023" (.38–.63 mm)
	P-Heavy Sealer (S-5-HSP)	This manual heavy duty PPY and PET sealer works well with mid-range straps.	115568	Seal	5-M	5/8" (16 mm)	.028"–.041" (.63–1.0 mm)

Steel Tools

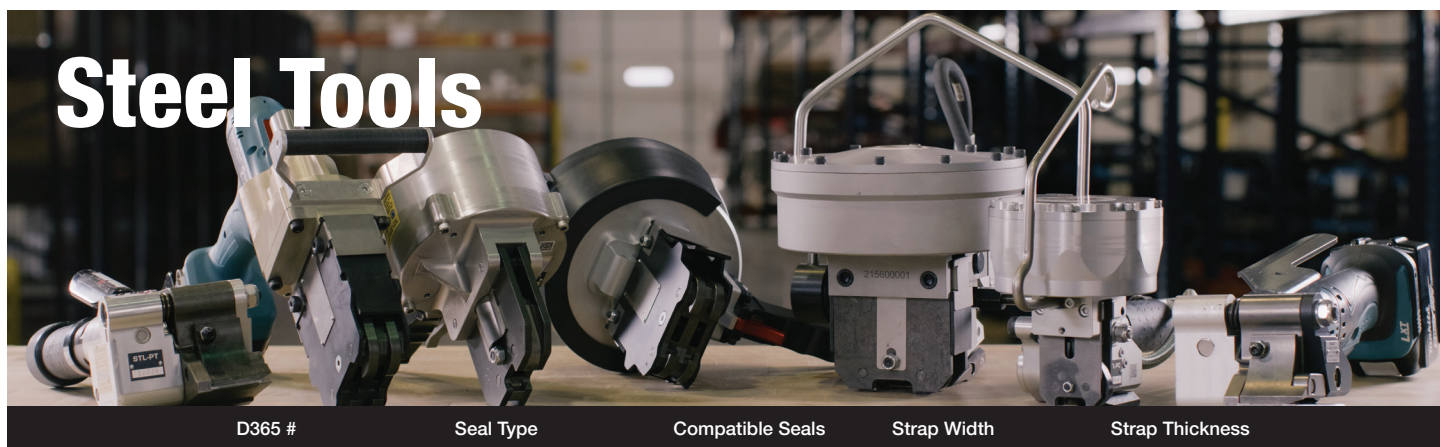

D365 # Seal Type Compatible Seals Strap Width Strap Thickness




MANUAL

STL-105 The STL-105 manual sealless combination tool for steel strap applies for a range of strap sizes. It is assembled in the USA.



183463	Sealless	—	1/2" (12 mm)	SD: .015"–.025" (.38–.63 mm)
183464	Sealless	—	5/8" (16 mm)	HT: .015"–.023" (.38–.58 mm)
183465	Sealless	—	3/4" (19 mm)	



BATTERY

STL-3ST The STL-3ST is a battery powered tension-only tool for steel strap. Pricing includes (1) strapping tool, (1) battery, (1) charger.

216713	—	34-HP, 114-HP	Up to 1 1/4" (32 mm)	SD & HT: .031"–.040" (.6–1.0 mm) HT: .02"–.031" (.6–.8 mm)
--------	---	---------------	----------------------	---

STL-3ST Accessories: 194144 14 V Battery
194147 14 V Charger



BATTERY

STL-3SS The STL-3SS is a sealing only tool using a double notch up-cut to achieve 75% joint efficiency with the mobility of a battery powered tool. Pricing includes (1) strapping tool, (1) battery, (1) charger.

192914	DN Up-Cut	34-HP, 34-HC	3/4" (19 mm)	SD & HT: .031"–.040" (.8–1.0 mm)
192915	DN Up-Cut	100-HP	1" (25 mm)	
192916	DN Up-Cut	114HP, 14HC	1 1/4" (32 mm)	

STL-3SS Accessories: 194145 18 V Battery
194147 18 V Charger



PNEUMATIC

Steel Tool Set: STL-3ST & STL-3SS This battery-powered steel strapping tool set offers the mobility of electric motors while maintaining power and efficiency. Pricing includes (1) tension tool, (1) sealing tool, (1) 14V battery, (1) 18V battery, (2) chargers.

220559	DN Up-Cut	34-HP, 34-HC	3/4" (19 mm)	SD & HT: .031"–.040" (.8–1.0 mm)
220556	DN Up-Cut	1HP, 1HC	1" (25 mm)	
220561	DN Up-Cut	114HP, 14HC	1 1/4" (32 mm)	



PNEUMATIC

STL-PT The STL-PT is a pneumatic steel tension-only tool for a wide range of strap sizes and types.

125942	—	34-HP, 114-HP	Up to 1 1/4" (32 mm)	SD: .025"–.040" (.64–1.0 mm) HT: .25"–.031" (.64–.80 mm)
--------	---	---------------	----------------------	---



PNEUMATIC

STL-PS The STL-PS is a light-weight tool offering a single notch up cut. The tool can be used twice on a single seal to achieve a double notch effect.

125940	SN Up-Cut	34-HP, 34-HC	3/4" (19 mm)	SD: .024"–.039" (.64–1.0 mm)
125941	SN Up-Cut	114HP, 14HC	1 1/4" (32 mm)	HT: .25"–.031" (.64–.80 mm)



PNEUMATIC

STL-PDN The STL-PDN offers a double notch up-cut joint in every seal.

125938	DN Up-Cut	34-HP, 34-HC	3/4" (19 mm)	SD & HT: .025"–.040" (.64–1.00 mm)
125939	DN Up-Cut	114HP, 14HC	1 1/4" (32 mm)	

Steel Tools

	D365 #	Seal Type	Compatible Seals	Strap Width	Strap Thickness
 PNEUMATIC	STL-PC This combination tension and single notch up-cut sealing tool is a light weight and efficient option for use with seals on small to mid-sized steel strapping. Pricing includes suspension bracket.				
	116540	SN Up-Cut	12-P	1/2" (12 mm)	SD: .016"–.031" (.40–.80 mm) HT: .16"–.025" (.40–.64 mm)
	116541	SN Up-Cut	58-P	5/8" (16 mm)	
	125935	SN Up-Cut	34-P	3/4" (19 mm)	
 PNEUMATIC	STL-PCHD This combination tension and double notch up-cut sealing tool is made for heavy duty applications for great tension and sealing results. Pricing includes suspension bracket.				
	125937	DN Up-Cut	34-HP	3/4" (19 mm)	SD: .024"–.039" (.60–1.00 mm) HT: .024"–.031" (.60–0.78 mm)
 PNEUMATIC	STL-PC32 This combination tension and double notch up-cut sealing tool is made for heavy duty applications for great tension and sealing results. Pricing includes suspension bracket.				
	125936	DN Up-Cut	114-HP	1 1/4" (32 mm)	SD: .024"–.039" (.60–1.00 mm) HT: .024"–.035" (.60–0.90 mm)
 MANUAL	STL-MT This manual feedwheel tool has unlimited take-up for both standard duty and high tensile steel strapping. It is assembled in the USA. 				
	116533	—	38-O, 12-O, 58-O, 34-O, 34-OL	3/8"–3/4" (9.5–19 mm)	SD & HT: .015"–.025" (.38–.63 mm)
 MANUAL	MWT-114HD This windlass type manual tensioning tool is great for heavy duty strap applications requiring high tension. It is assembled in the USA. 				
	220880	—	34HP, 34HSP, 114HT, 114EHT	3/4"–1 1/4" (19–32 mm)	SD & HT: .028 thru .0335" (.71–.89 mm)
 MANUAL	STL-MS The STL-MS is a top-sealing tool for easy and mobile sealing applications. It is assembled in the USA. 				
	193608	SN Down-Cut	12-O	1/2" (12 mm)	SD & HT: .015"–.024" (.38–.6 mm)
	193612	SN Down-Cut	58-O	5/8" (16 mm)	SD & HT: .015"–.024" (.38–.6 mm)
	109098	SN Down-Cut	34-O	3/4" (19 mm)	SD & HT: .015"–.024" (.38–.6 mm)
 MANUAL	STL-MLS The STL-MLS is a side action double notch up-cut seal-only tool. It is assembled in the USA. 				
	109981	DN Up-Cut	34-HP, 34-HC	3/4" (19 mm)	SD & HT: .025"–.035" (.63–.89 mm)
	109980	DN Up-Cut	114-HP, 1114-HC	1 1/4" (32 mm)	SD & HT: .025"–.035" (.63–.89 mm)

Cord Tools

	Model Name	Description	D365 #	Strap Width
MANUAL	 C-Light Tensioner (6DTCET19)	This light duty windlass style tension-only cord strapping tool is a great option for quick manual tensioning and sealing.	126233	Up to 3/4" (19 mm)
	 C-Heavy Tensioner (6DTCET40)	This heavy duty windlass style tension-only cord strapping tool includes a shear action for quick tension, seal, and cutting operation.	126234	Up to 1.5" (38 mm)

Cutting Tools

	Model Name	Description	D365 #	Strap Width	Strap Thickness
ELECTRIC PLUG-IN	 SC-Medium Duty (SMDS1)	Medium duty strap cutter with 12" handles, appropriate for both plastic and steel strap.	109106	Up to 2" (50 mm)	Up to .035" (.89 mm)
	 SC-Heavy Duty (SMDS)	Heavy duty strap cutter with 21" handles, appropriate for both plastic and steel strap.	109105	Up to 2" (50 mm)	Up to .050" (1.3 mm)
	 Cut-to-Length (7ZCTL440)	Cut to length machine for plastic strapping can accurately create strips from .10'-99' (.03-30 m).	201723	3/8"-2" (9.5-50 mm)	
		Cut to length machine for steel strapping can accurately create strips from .10'-99' (.03-30 m).	125652	SD & HT: 3/8"-2" (9.5-50 mm)	
	 Strap Chopper (HLC-80)	Strap chopping can cut plastic strapping with seals into 3" (76 mm) pieces for easy disposal or recycling.	116280	Up to 1.25" (32 mm)	
		Strap chopping can cut steel strapping with seals into 3" (76 mm) pieces for easy disposal or recycling.	161521	SD & HT: Up to 1.25" (32 mm)	
	 Strap Chopper Accessories (6B150STD)	Stand for the strap chopper, can be used for both plastic and steel models. Includes kit with wheels.	201722		

All tools achieve 75% joint efficiency or greater.
Volume discounts may be available, ask your sales rep today!
Ask about bundling tools with strap and dispensers!

Warranty For Tools. Tools (including spare wear parts) shall be defect free and conform to our product specifications. The warranty period for Tools (excluding spare wear parts) is 1 year from the date of sale. **Warranty for Spare Wear Parts.** The warranty period for the spare wear parts is 90 days from the date of sale. **Warranty Process (outside of Australia)** – Customers are required to contact the seller and request a return authorization. The return request must include date of purchase, serial number and proof of purchase. Warranty is limited to the repair or replacement FOB seller's point of shipment. Customers shall be responsible for all labor costs associated with the repairs. **Disclaimer.** Manufacturer expressly disclaims any and all other warranties not expressly set forth in this warranty. Manufacturer shall not be responsible for any special, indirect, punitive or consequential damages.